

## 3,500 WATT INVERTER GENERATOR MODEL: BE3500IP


COMMERCIAL SERIES

### FEATURES

- **Quiet and powerful inverter** capable of performing many tasks. Especially popular for camping.
- **Produces clean energy** that is needed for sensitive electronics like cell phones and computers.
- **Rugged and reliable engine** with automatic low oil-shutdown that safeguards the engine.
- **Copper alternator windings** increases efficiency and reduces heat build up to extend lifespan.
- **Easy access outlets** are protected by circuit breakers for safety.
- **Sound dampening shell** lowers volume and has easy access panels to keep maintenance simple.
- **Folding handle and wheels** makes it easy to transport.



Scan the QR code with your mobile device and discover more about this BE Inverter.

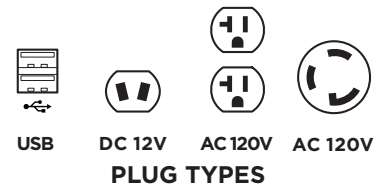

### ENGINE

MODEL: **POWEEASE 212CC**  
 TYPE: **AIR COOLED, 4-STROKE OHV**  
 DISPLACEMENT: **212CC**  
 DB RATING: **59dB @ 7M**  
 ECONOMY MODE: **ELECTRONIC**  
 START TYPE: **PULL START**  
 FUEL TYPE: **86 OCTANE, UP TO 10% ETHANOL**  
 FUEL TANK SIZE: **9L (2.2 GAL)**  
 APPROX RUN TIME: **8HR @ 1/2 LOAD**  
 OIL TYPE: **SAE 10W30**  
 CERTIFICATIONS: **CSA, EPA III AND CALI CARB**

### FRAME

TYPE: **ENCLOSED PLASTIC SHELL**  
 PORTABILITY: **CARRY HANDLE**  
 WHEELS: **5" PLASTIC**

### ALTERNATOR

MAX WATT: **3,500 W**  
 RUNNING WATT: **3,000 W**  
 MASTER CIRCUIT BREAKER: **25A**  
 VOLTAGES: **120V**  
 WINDINGS: **COPPER COATED**  
 HARMONIC DISTORTION: **MAX 2.5%**  
 GROUNDING: **NEUTRAL BONDED**

### OUTLETS

2x USB PORTS  
 1x DC 12V@8.3A  
 2x 120V 20A HOUSEHOLD, NEMA 5-20R  
 1x 120V 30A TWISTLOCK, NEMA L5-30R  
 PARALLEL CAPABILITY

### BOXED SIZE

LxWxH: **30" x 20" x 22"**  
 WEIGHT: **108 LBS**

### UNIT SIZE

UNIT WEIGHT: **95 LBS**

### WARRANTY

ENGINE BASIC: **2 YEARS**  
 ENGINE REGISTERED: **5 YEARS**  
 ELECTRONICS: **1 YEAR**  
 UPC: **777897301953**

## ONDULEUR 3,500 WATT MODÈLE: BE3500IP

COMMERCIAL


SERIES

### CARACTÉRISTIQUES

- **Onduleur ultra-léger**  et silencieux facile à transporter pour fournir de l'électricité dans des endroits plus éloigné.
- **Produit de l'énergie**  propre nécessaire aux appareils électroniques sensibles tel que cellulaires et ordinateurs.
- **Moteur robuste et fiable**  avec arrêt niveau bas niveau d'huile automatique le gardant en sécurité.
- **Enroulements d'alternateur**  en cuivre augmentant l'efficacité et réduisant la chaleur accumulée prolongeant la longévité.
- **Sorties facile d'accès**  protégées par des disjoncteurs pour la sécurité.
- **Coquilles insonorisantes**  réduisant le volume et avec des panneaux facile d'accès gardant l'entretien simple.
- **Poignées pliantes**  et roues facilitant le déplacement.



Scannez le code QR avec votre cellulaire et apprenez-en plus à propos de cette laveuse BE Pressure.

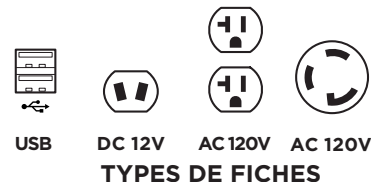

### MOTEUR

MODÈLE: **POWEEASE 212CC**  
 TYPE: **REFROIDISSEMENT PAR AIR, 4-TEMPS OHV**  
 DISPLACEMENT: **212CC**  
 TAUX DB: **59dB @ 7M**  
 ECONOMY MODE: **ÉLECTRONIQUE**  
 TYPE DE DÉMARRAGE: **DÉMARRAGE MANUEL**  
 TYPE D'ESSENCE: **86 OCTANE, JUSQU'À 10% ETHANOL**

TAILLE DU RÉSERVOIR DE CARBURANT: **9L (2.2 GAL)**  
 TEMPS APPROX. EN MARCHÉ: **8HR @ 1/2 LOAD**  
 TYPE D'HUILE: **SAE 10W30**  
 CERTIFICATIONS: **CSA, EPA III ET CALI CARB**

### CHASSIS

TYPE: **COQUE EN PLASTIQUE FERMÉE**  
 PORTABILITÉ: **POIGNÉE DE TRANSPORT**  
 WHEELS: **5" PLASTIQUE**

### ALTERNATEUR

MAX WATT: **3,500 W**  
 WATT EN MARCHÉ: **3,000 W**  
 DISJONCTEUR MAÎTRE: **25A**  
 TENSIONS: **120V**  
 ENROULEMENTS: **REVÊTEMENT DE CUIVRE**  
 DISTORSION HARMINIQUE: **MAX 2.5%**  
 MISE À LA TERRE: **NEUTRE LIÉ**

### PRISES ÉLECTRIQUES

2x PORT USB  
 1x DC 12V@8.3A  
 2x 120V 20A MÉNAGE, NEMA 5-20R  
 1x 120V 30A TWISTLOCK, NEMA L5-30R  
 CAPACITÉ PARALLÈLE

### TAILLE DE LA BOÎTE



### TAILLE DE LA BOÎTE

LxWxH: **30" x 20" x 22"**  
 POIDS: **108 LBS**  
 POIDS DE L'APPAREIL **95 LBS**

### GARANTIE

MOTEUR DE BASE: **2 ANS**  
 ENGINE REGISTERED: **5 ANS**  
 ÉLECTRONIQUES: **1 AN**  
 UPC: **777897301953**

11-2021